

**Sam-Erik Walker** ([sew@nilu.no](mailto:sew@nilu.no)), **Janne Berger**  
Norwegian Institute for Air Research (NILU)

### Description

The aim of this case study is to see if open road line source models can be improved by using local air quality (AQ) observations.

Data assimilation is used to improve estimates of model input parameters (meteorology), and thereby reducing the uncertainties in the model output concentrations.

### WORM line source model

WORM = **W**eak **W**ind **O**pen **R**oad **M**odel

- New Gaussian integrated line source model developed at NILU
- Originally similar to the CAR-FMI model
- Contains a meteorological preprocessor based on Monin-Obukhov similarity theory (MEPDIM)
  - Wind, temperature and turbulence profiles
  - Lagrangian time scales
  - Mixing height
- Minimum setting of  $\sigma_v = 0.5$  m/s
- Uses an accurate numerical integration scheme based on Gauss-quadrature to calculate concentrations in receptor points

### Data set used

Nordbysletta in Lørenskog close to Oslo. Single 850 m long roadway with 4 separate lanes.



Hourly data from 1 January – 15 April 2002:

- Observations of  $\text{NO}_x$ ,  $\text{NO}_2$ ,  $\text{O}_3$  and PM at three stations close to the roadway
- Observations of background concentrations of the same species
- Wind speed, wind direction and vertical temp. difference
- Traffic counting of light and heavy duty vehicles

### Data filter applied

Wind direction between 58 and 238 degrees i.e. direction of wind towards stations 1 - 3. Wind speed above 0.5 m/s at 10 m height.

### Nordbysletta

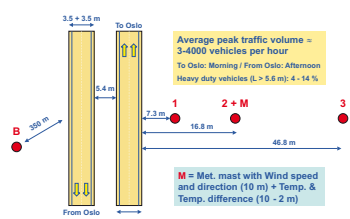

Picture, map and figure showing the 4-lane roadway at Nordbysletta.

Traffic with more than 60 vehicles per hour.

### Resulting data set:

- 1038 hours of data from a total of 2520 hours

### WORM model setup

Surface roughness tentatively set to 0.25 m based on Davenport & Wieringa site classification

Emission height = 0.5 m (lane) + 1.0 m (dam) = 1.5 m


Initial horizontal and vertical dispersion parameters  $\sigma_{y0}$  and  $\sigma_{z0}$  defined as in CAR-FMI (1976 GM experiment)

- $\sigma_{y0} \approx 5-7$  m and  $\sigma_{z0} \approx 2.5-3.5$  m

Focus on  $\text{NO}_x$  since it is the simplest component


- No photochemical reactions
- Easier to estimate emissions than for PM

### Model evaluation




	Obs 1	Mod 1	Obs 2	Mod 2	Obs 3	Mod 3
N = 1038	137	140	103	129	67	99
AVER	120	162	93	144	67	119
MAX	722	1336	581	1185	463	979
RMSE	82	62	62	78	78	78
RMSS	25	42	42	48	48	48
COEF	0.88	0.87	0.86	0.86	0.86	0.86


The evaluation shows that the model overpredicts on all three stations.



Net observed (top blue) and modelled (bottom yellow)  $\text{NO}_x$  concentrations at station 2 (16.8 m from the roadway) as a function of wind speed at 10 m above ground.



Dependence on wind direction.



Dependence on stability.

The figures show good correspondence between observed and modelled values, except for low wind speed and stable conditions (< 1-2 m/s), where the model overpredicts.

### Data assimilation setup

- Use observations of  $\text{NO}_x$  at station 2 to estimate  $\sigma_v$  (theta-v) and  $\sigma_{y0}$  (sigma-y0) on an hourly basis
- Use a sequential Monte-Carlo method


known as SIR (Sequential Importance Re-sampling) to estimate the parameters

- Based on a Gaussian likelihood function for the parameters assuming that the AQ observations have 5% relative error


- Create ensembles of  $N = 2500$  modelled  $\text{NO}_x$  conc. at each station for each hour by randomly drawing input parameters

- $\sigma_v \sim \text{Uniform}(\sigma_{v0}, 2)$
- $\theta_v = \text{atan}(\sigma_v / u_h)$
- $\sigma_{y0} \sim \text{Normal}(\sigma_{y0}, 1.5)$
- $\sigma_{y0} = 2 * \sigma_{z0}$


### Data assimilation results

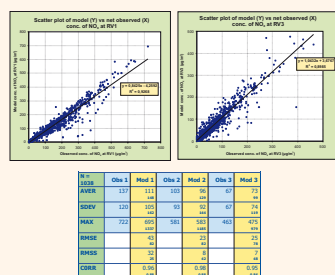

The adjusted model based on data assimilation no longer systematically overpredicts  $\text{NO}_x$  concentrations as shown at the independent stations 1 and 3.



This is also shown in these Q-Q plots of percentiles of observed and model calculated concentrations of  $\text{NO}_x$ , before of data assimilation (blue curve) and after (red curve).

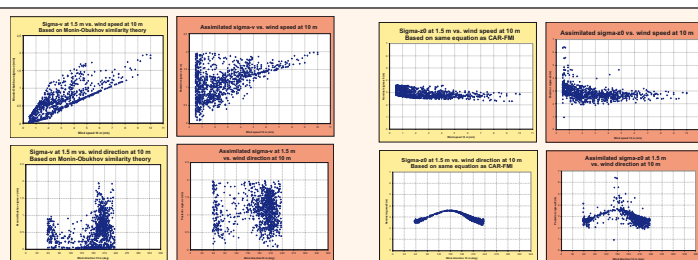

Horizontal diffusion ( $\sigma_{y0}$ ) calculated according to standard Monin-Obukhov similarity theory (yellow plots) and estimated based on data assimilation (red plots). Shown in the top row as a function of wind speed (10 m), and in the bottom row as a function of wind direction.

Initial dispersion ( $\sigma_{z0}$ ) calculated according to the 1976 GM experiment semi-empirical model (yellow plots) and estimated based on data assimilation (red plots). Shown in the top row as a function of wind speed (10 m), and in the bottom row as a function of wind direction.

### Conclusions

- Gaussian integrated lines source models such as the WORM model can clearly be improved by assimilation of roadside AQ observations
- Estimation of horizontal diffusion and initial size of plume can be used to correct for systematic errors in the high percentiles of the model concentration distribution
- Other results in this case study show that
  - Using more than one station helps to improve the model further but at a slower pace
  - Vertical processes are more easy to estimate than horizontal ones
  - It is difficult to estimate Lagrangian time scales

### References

- Air4EU - CS D 7.1.4 2006. Data assimilation in open road line source modelling. <http://www.air4eu.nl>.
- Air4EU - M.5 2006. Data assimilation. <http://www.air4eu.nl>.
- Doucet A. et al (eds.) Sequential Monte Carlo methods in practice. Springer Verlag, New York.